


PRODUCT DATA SHEET



SQUINT™ VEHICULAR ANTENNAS:

- Heavy Duty Roof Mounting
- Available for ISM/PCS/DCS Frequencies

SQ2403PV

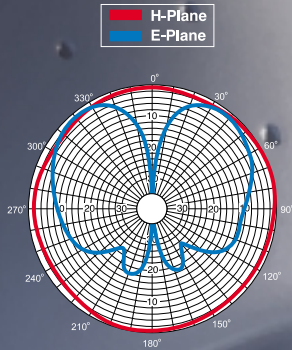

SQ2403PV

Radome Enclosed Vehicular Antennas for PCS/DCS and ISM band

Cushcraft offers omnidirectional radome enclosed vehicular antennas for fleet management data systems, other vehicular information systems or for Internet access. Antennas are offered in frequencies from 1.7 GHz. to 5.875 GHz and can be supplied with either integral coax pigtailed or fixed connectors. Dimensions of the antenna are 4" x 4" x 7/8". Antennas are supplied with mounting hardware designed for either heavy construction vehicles or transportation systems vehicles as well as standard service vans and passenger cars.

SQUINT VEHICULAR SPECIFICATION CHART

Model	Freq. GHz	Gain dBi	3dB bmwidth E-Plane	3dB bmwidth H-Plane	Weight lb (kg)	Power (Watts)	Enclosure Material	Mount Style
SQ2403PV12NF	2.4 - 2.5	3	70°	Omnidirectional	0.3 (0.14)	20	PVC/Acrylic	Surface/Gasketed
SQ2403PTA12NF	2.4 - 2.5	3	70°	Omnidirectional	0.3 (0.14)	20	PVC/Acrylic	Self-Adhesive
SQ1852PV12NF	1.85 - 1.55	2	75°	Omnidirectional	0.4 (0.14)	20	PVC/Acrylic	Surface/Gasketed